


Three phase, totally enclosed, foot mounted

1/8 thru 250 Hp

IP44*

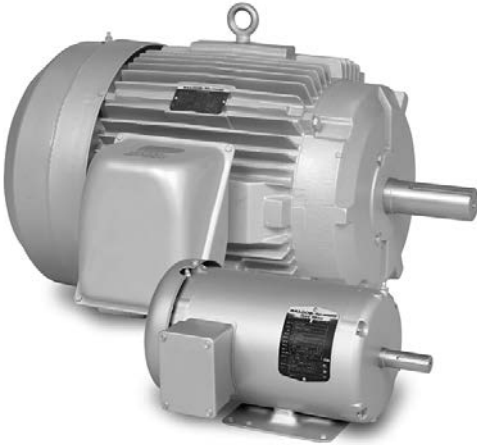

Features:

- 60 Hz designs with 50 Hz information on 2,4,6 pole 1-125 Hp ratings
- 2,4,6,8 pole
- Suitable for inverter use per NEMA MG1 Part 31.4.4.2 unless note 38 is indicated
- Simple F1 to F2 conversion on cast iron frames
- Designed for longevity with a 3 year warranty on premium efficient Super-E® motors

Applications:

- Fans
- Pumps
- Blowers
- Conveyors
- Compressors
- Industrial machines
- Other general purpose applications

Hp	RPM	NEMA Frame	Enclosure	Catalog Number	Disc. Sym.	“C” Dim.	Aprx. Wt. (lb)	Full Load Efficiency	Voltage	Full Load Amps	Notes (a)	
230/460 volts												
1/8	1800	42	TEFC	M3353	GE3	9.56	16	44	230/460	0.5	30, 38	
1/6	1800	42	TEFC	M3355	GE3	9.56	17	62	230/460	0.6	13, 30, 38	
	1200	48	TEFC	M3452	GE3	10.73	17	57.5	230/460	0.6	13, 30, 38	
1/4	1800	48	TEFC	M3454	GE3	10.73	19	64	230/460	0.7	13, 30, 38	
		48	TENV	NM3454	GE3	9.62	20	68	230/460	0.5	1, 13, 30, 38	
		56	TENV	NM3454/35	GE3	11.06	28	80	230/460	0.4	1, 30, 48	
		48	TEFC	M3455	GE3	10.73	18	68	230/460	0.7	13, 30, 38	
	1200	48	TENV	NM3455	GE3	9.62	19	68	230/460	0.7	30, 38	
		56	TEFC	M3531	GE3	11.35	23	68	230/460	0.7	13, 30, 38	
		900	56	TEFC	M3532	GE3	12.23	28	57.5	208-230/460	0.8	13
		3600	48	TENV	M3457	GE3	9.62	20	72	230/460	0.7	13, 30, 38
1/3	1800	48	TEFC	M3458	GE3	10.73	21	68	230/460	0.8	13, 30, 38	
		56	TEFC	M3534	GE3	11.35	21	68	230/460	0.8	13, 30, 38	
		56	TENV	NM3534	GE3	10.25	23	70	230/460	0.7	1, 13, 30, 38	
		1200	56	TEFC	M3535	GE3	11.35	22	70	230/460	0.9	13, 30, 38
	900	56	TEFC	M3536	GE3	12.23	29	59.5	208-230/460	1	13	
	3600	48	TEFC	M3460	GE3	10.73	19	68	230/460	1	12, 30, 38	
		56	TEFC	M3537	GE3	11.35	19	68	230/460	1	12, 30, 38	
		48	TEFC	M3461	GE3	10.73	22	74	230/460	1	12, 30, 38	
1/2		1800	56	TEFC	EM3538	GE3	12.23	29	82.5	230/460	0.8	1, 30
	56		TEFC	M3538	GE3	11.35	23	74	230/460	1	12, 30, 38	
	56		TEFC	M3538/35	GE3	12.23	25	72	208-230/460	1.1	1, 48	
	56		TENV	NM3538	GE3	10.88	25	75.5	230/460	0.9	1, 12, 30, 38	
	1200	56	TENV	NM3538/35	GE3	11.06	27	80	230/460	0.8	1, 30, 48	
		56	TEFC	M3539	GE3	11.35	24	72	230/460	1.2	30, 38	
		56	TENV	NM3539	GE3	12.06	40	78.5	230/460	1	30	
		900	56H	TEFC	M3560	GE3	12.91	38	70	208-230/460	1.3	36
3/4	3600	48	TEFC	M3463	GE3	10.73	21	74	230/460	1.3	12, 30, 38	
		56	TEFC	M3541	GE3	11.35	21	74	230/460	1.3	12, 30, 38	
		48	TEFC	M3464	GE3	10.73	25	75.5	208-230/460	1.5	12, 38	
		56	TEFC	M3542	GE3	11.35	25	75.5	208-230/460	1.5	12, 38	
	1200	56	TENV	NM3542	GE3	11.06	29	78.5	230/460	1.4	1, 12, 30	
		56	TEFC	M3543	GE3	12.84	32	77	208-230/460	1.5	38	
		143T	TEFC	M3543T	GE3	13.41	33	77	208-230/460	1.5	38	
		900	145T	TEFC	M3562T	GE3	14.19	51	72	208-230/460	1.6	1, 30

(a) See notes on inside back flap.

*IP54 when Drain Fitting Kit #HA5027A03 is installed in the weep holes (48 thru 256T frame motors only)

Three phase, totally enclosed, foot mounted

Hp	RPM	NEMA Frame	Enclosure	Catalog Number	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Efficiency	Voltage	Full Load Amps	Notes (a)
230/460 volts (continued)											
1	3600	56	TEFC	EM3545	GE3	12.25	37	77	230/460	1.4	1, 12, 30
		56	TEFC	EM3546	GE3	12.23	35	85.5	230/460	1.5	1, 30
		56	TENV	ENM3546	GE3	12.06	39	85.5	230/460	1.5	1, 30
	1800	143T	TEFC	EM3546T	GE3	12.31	35	85.5	230/460	1.5	1, 30
		143T	TEFC	EM3581T	GE3	12.53	51	85.5	230/460	1.5	1, 30
		143T	TENV	ENM3546T	GE3	12.12	39	85.5	230/460	1.5	1, 30
	1200	56	TEFC	EM3556	GE3	13.23	42	82.5	230/460	1.8	1, 30
		145T	TEFC	EM3556T	GE3	13.31	42	82.5	230/460	1.8	1, 30
		145T	TEFC	EM3582T	GE3	12.53	56	82.5	230/460	1.7	1, 30
	900	182T	TEFC	EM3617T	GE3	16.54	65	75.5	230/460	2.3	1, 30
1 1/2	3600	56	TEFC	EM3550	GE3	12.25	35	84	230/460	1.9	1, 30
		143T	TEFC	EM3550T	GE3	12.31	36	84	230/460	1.9	1, 30
		143T	TEFC	EM3583T	GE3	12.53	52	84	230/460	1.9	1, 30
	1800	56	TEFC	EM3554	GE3	13.23	40	86.5	230/460	2.2	1, 30
		145T	TEFC	EM3554T	GE3	13.31	41	86.5	230/460	2.2	1, 30
		145T	TEFC	EM3584T	GE3	12.53	57	86.5	230/460	2.3	1, 30
	1200	145T	TENV	ENM3554T	GE3	13.00	50	86.5	230/460	2.1	1, 30
		182T	TEFC	EM3607T	GE3	16.55	73	87.5	230/460	2.4	1, 30
		182T	TEFC	EM3667T	GE3	15.24	93	87.5	230/460	2.5	1, 30
	900	184T	TEFC	EM3618T	GE3	18.04	82	78.5	230/460	3	1, 30
2	3600	56	TEFC	EM3555	GE3	13.25	42	85.5	230/460	2.5	1, 30
		145T	TEFC	EM3555T	GE3	13.29	43	85.5	230/460	2.5	1, 30
		145T	TEFC	EM3586T	GE3	12.55	59	85.5	230/460	2.5	1, 30
	1800	56	TEFC	EM3558	GE3	13.23	46	86.5	230/460	2.9	1, 30
		145T	TEFC	EM3558T	GE3	13.31	45	86.5	230/460	2.9	1, 30
		145T	TEFC	EM3587T	GE3	12.53	58	86.5	230/460	2.9	1, 30
	1200	184T	TEFC	EM3614T	GE3	18.05	93	88.5	230/460	3.5	1, 30
		184T	TEFC	EM3664T	GE3	15.24	109	88.5	230/460	3.2	1, 30
	900	213T	TEFC	EM3702T	GE3	17.89	110	84	230/460	3.5	1, 30
3	3600	56H	TEFC	EM3559	GE3	13.79	50	86.5	230/460	3.6	1, 30
		145T	TEFC	EM3559T	GE3	14.17	49	86.5	230/460	3.6	1, 30
		182T	TEFC	EM3610T	GE3	15.14	50	86.5	230/460	3.6	1, 30
	1800	182T	TEFC	EM3660T	GE3	15.24	84	86.5	230/460	3.8	1, 30
		182T	TEFC	EM3611T	GE3	16.55	73	89.5	230/460	4.2	1, 30
		182T	TEFC	EM3661T	GE3	15.24	97	89.5	230/460	4.1	1, 30
	1200	213T	TEFC	EM3704T	GE3	19.02	134	89.5	230/460	4.6	1, 30
		213T	TEFC	EM3764T	GE3	18.45	173	89.5	230/460	4.5	1, 30
	900	215T	TEFC	EM3705T	GE3	19.01	111	86.5	230/460	5.2	1, 30
5	3600	184T	TEFC	EM3613T	GE3	16.55	75	88.5	230/460	5.9	1, 30
		184T	TEFC	EM3663T	GE3	15.24	99	88.5	230/460	5.8	1, 30
		184T	TEFC	EM3615T	GE3	18.05	93	89.5	230/460	6.7	1, 30
	1800	184T	TEFC	EM3665T	GE3	15.24	107	89.5	230/460	6.6	1, 30
		215T	TEFC	EM3708T	GE3	19.77	154	89.5	230/460	7.3	1, 30
		215T	TEFC	EM3768T	GE3	18.45	195	89.5	230/460	7.4	1, 30
	900	254T	TEFC	EM2280T	GE3	23.28	256	86.5	230/460	7.9	1, 30
7 1/2	3600	184T	TEFC	EM3616T	GE3	18.05	98	89.5	230/460	8.4	1, 30
		213T	TEFC	EM3709T	GE3	17.89	116	89.5	230/460	9	1, 30
		213T	TEFC	EM3769T	GE3	18.45	165	89.5	230/460	9	1, 30
	1800	213T	TEFC	EM3710T	GE3	19.02	128	91.7	230/460	9.4	1, 30
		213T	TEFC	EM3770T	GE3	18.45	170	91.7	230/460	9.5	1, 30
	1200	254T	TEFC	EM2276T	GE3	23.28	278	91	230/460	11	1, 30
10	900	256T	TEFC	EM2401T	GE3	23.28	320	86.5	230/460	12.2	1, 30
	3600	215T	TEFC	EM3711T	GE3	17.89	120	90.2	230/460	11.8	1, 30
		215T	TEFC	EM3771T	GE3	18.45	182	90.2	230/460	11.8	1, 30
	1800	215T	TEFC	EM3714T	GE3	20.52	162	91.7	230/460	12	1, 30
		215T	TEFC	EM3774T	GE3	18.45	191	91.7	230/460	12.2	1, 30
	1200	256T	TEFC	EM2332T	GE3	23.28	290	91	230/460	14.1	1, 30
	900	284T	TEFC	EM2402T	GE3	27.76	391	89.5	230/460	14.6	1, 30

(a) See notes on inside back flap.

■ Cast iron frame

*IP54 when Drain Fitting Kit #HA5027A03 is installed in the weep holes (48 thru 256T frame motors only)

Information

Single phase

General purpose

Severe duty

Large AC

Washdown duty

Explosion proof

Pump

HVAC

Farm duty

Three phase, totally enclosed, foot mounted

Hp	RPM	NEMA Frame	Enclosure	Catalog Number	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Efficiency	Voltage	Full Load Amps	Notes (a)
230/460 volts (continued)											
15	3600	215T	TEFC	EM3713T	GE3	20.52	172	91	230/460	17	1, 30
		254T	TEFC	EM2394T	GE3	23.28	241	91	230/460	17.5	1, 30
	1800	254T	TEFC	EM2333T	GE3	23.28	270	92.4	230/460	18.1	1, 30
	1200	284T	TEFC	EM4100T	GE3	27.76	391	91.7	230/460	21	1, 30
	900	286T	TEFC	EM2395T	GE3	27.76	455	89.5	230/460	23	1, 30
20	3600	256T	TEFC	EM4106T	GE3	23.28	262	91	230/460	23	1, 30
	1800	256T	TEFC	EM2334T-12	GE3	23.28	291	93	230/460	23	1, 30
		256T	TEFC	EM2334T	GE3	23.28	289	93	230/460	24	1, 30
	1200	286T	TEFC	EM4102T	GE3	27.76	399	91.7	230/460	27	1, 30
	900	324T	TEFC	EM4112T	GE3	30.28	534	90.2	230/460	35	1, 30
25	3600	256T	TEFC	EM4118T	GE3	23.28	305	91.7	230/460	29	1, 30
		284TS	TEFC	EM4107T	GE3	24.70	327	91.7	230/460	29	1, 30
	1800	284T	TEFC	EM4103T	GE3	27.76	388	93.6	230/460	30	1, 30
	1200	284T	TEFC	EM4103T-12	GE3	27.56	402	93.6	230/460	30	1, 25, 30
		324T	TEFC	EM4111T	GE3	30.39	445	93	230/460	32	1, 30
30	900	326T	TEFC	EM4116T	GE3	30.28	578	90.2	230/460	37	1, 30
	3600	286TS	TEFC	EM4108T	GE3	24.70	347	91.7	230/460	34	1, 30
		286T	TEFC	EM4104T	GE3	27.76	430	93.6	230/460	38	1, 30
	1200	286T	TEFC	EM4104T-12	GE3	27.76	425	93.6	230/460	36	1, 25
	1200	326T	TEFC	EM4117T	GE3	30.28	604	93	230/460	39	1, 30
40	900	364T	TEFC	EM4338T	GE3	33.44	813	92.4	230/460	39.3	1, 30
	3600	324TS	TEFC	EM4109T	GE3	28.78	551	92.4	230/460	46	1, 30
	1800	324T	TEFC	EM4110T	GE3	30.28	570	94.1	230/460	48	1, 30
		324T	TEFC	EM4110T-12	GE3	30.28	601	94.1	230/460	48	1, 25, 30
	1200	364T	TEFC	EM4308T	GE3	33.48	899	94.1	230/460	49.4	1, 30
50	900	364T	TEFC	EM4348T	GE3	33.48	875	93	230/460	52	1, 30
	3600	326TS	TEFC	EM4114T	GE3	28.78	575	93	230/460	56	1, 30
	1800	326T	TEFC	EM4115T	GE3	30.28	650	94.5	230/460	58	1, 30
		326T	TEFC	EM4115T-12	GE3	30.28	652	94.5	230/460	58	1, 25
	1200	365T	TEFC	EM4312T	GE3	28.78	639	94.5	230/460	58	1, 30
60	900	405T	TEFC	EM4458T	GE3	33.48	902	94.1	230/460	61.7	1, 30
	3600	405T	TEFC	EM4458T	GE3	38.20	1216	93	230/460	63	1, 30
		364TS	TEFC	EM4310T	GE3	31.36	810	95	230/460	65.1	1
	1800	364T	TEFC	EM4314T	GE3	33.48	912	95	230/460	67.8	1, 30
		364T	TEFC	EM4314T-12	GE3	33.48	850	95	230/460	68	1, 25
75	1200	364TS	TEFC	EM4314TS	GE3	31.36	907	95	230/460	68	1, 30
		404T	TEFC	EM4403T	GE3	38.04	1187	95	230/460	69	1
	900	405T	TEFC	EM4468T	GE3	38.20	1216	93	230/460	76	1
	3600	365TS	TEFC	EM4313T	GE3	31.36	980	94.5	230/460	80.7	1
	1800	365T	TEFC	EM4316T	GE3	33.48	955	95.4	230/460	84.9	1, 30
100		365TS	TEFC	EM4316TS	GE3	33.48	955	95.4	230/460	85.9	1, 25
100	1200	405T	TEFC	EM4404T	GE3	31.36	946	95.4	230/460	85.9	1
		405T	TEFC	EM4404T	GE3	38.04	1229	94.5	230/460	86.8	1
	3600	405TS	TEFC	EM4402T-4	GE3	35.04	1187	95	460	110	1, 25
	1800	405T	TEFC	EM4400T	GE3	38.04	1203	95.4	230/460	112	1
		125		405TS	TEFC	EM4400T-12	GE3	38.04	1211	95.4	230/460
125	1200	444T	TEFC	EM4400TS	GE3	35.04	1206	95.4	230/460	112	1
		444T	TEFC	EM4409T-4	GE3	44.75	1828	95	460	119	1
	3600	444TS	TEFC	EM4412T-4	GE3	40.83	1901	95	460	137	1
	1800	444T	TEFC	EM4410T-4	GE3	44.75	1969	95.4	460	144	1, 25
		Farm duty		444TS	TEFC	EM4410TS-4	GE3	41.08	2001	95.4	460
150	1200	444T	TEFC	EM4410TR-4	GE3	44.75	1988	95.4	460	144	1, 5
		445T	TEFC	EM4411T-4	GE3	44.75	2073	95	460	146	1, 25
	3600	445TS	TEFC	EM4413T-4	GE3	41.08	1995	95	460	164	1
	1800	445T	TEFC	EM4406T-4	GE3	44.75	1826	95.8	460	169	1, 25
		Farm duty		445TS	TEFC	EM4406TS-4	GE3	41.08	2071	95.8	460
1200	445T	TEFC	EM4406TR-4	GE3	44.75	1826	95.8	460	169	1, 5, 25	
	447T	TEFC	EM44156T-4	GE3	48.24	2571	95.8	460	170	1, 25	

(a) See notes on inside back flap.

Cast iron frame

*IP54 when Drain Fitting Kit #HA5027A03 is installed in the weep holes (48 thru 256T frame motors only)

Three phase, totally enclosed, foot mounted

Hp	RPM	NEMA Frame	Enclosure	Catalog Number	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Efficiency	Voltage	Full Load Amps	Notes (a)
230/460 volts (continued)											
200	3600	447TS	TEFC	EM4416T-4	GE3	44.48	2355	95.4	460	216	1
		447T	TEFC	EM4407T-4	GE3	48.24	2497	96.2	460	223	1, 25
	1800	447TS	TEFC	EM4407TS-4	GE3	44.48	2487	96.2	460	223	1
		447T	TEFC	EM4407TR-4	GE3	48.24	2531	96.2	460	223	1, 5
	1200	449T	TEFC	EM44206T-4	GE3	53.24	3017	95.8	460	225	1
250	3600	449TS	TEFC	EM44252T-4	GE3	49.48	2595	95.8	460	268	1
		447T	TEFC	EM4408T-4	GE3	53.22	2888	96.2	460	276	1, 25
	1800	447T	TEFC	EM4408TR-4	GE3	53.22	2888	96.2	460	276	1, 5
		447TS	TEFC	EM4408TS-4	GE3	59.47	2888	96.2	460	276	1, 25
	1200	449T	TEFC	EM44256T-4	GE3	53.22	3125	95.8	460	285	1, 25
200 volts											
1	1800	143T	TEFC	EM3546T-8	GE3	12.31	35	85.5	200	3.5	1, 68
1 1/2	1800	145T	TEFC	EM3554T-8	GE3	13.31	43	86.5	200	5	1, 68
2	1800	145T	TEFC	EM3558T-8	GE3	13.31	46	86.5	200	6.7	1, 68
3	3600	182T	TEFC	EM3660T-8	GE3	15.24	82	86.5	200	8.8	1, 68
		182T	TEFC	EM3661T-8	GE3	15.24	96	89.5	200	9.5	1, 68
	1800	182T	TEFC	EM3611T-8	GE3	16.55	72	89.5	200	9.7	1, 68
5	3600	184T	TEFC	EM3663T-8	GE3	15.24	99	88.5	200	13.3	1, 68
		184T	TEFC	EM3665T-8	GE3	15.24	108	89.5	200	15.1	1, 68
	1800	184T	TEFC	EM3615T-8	GE3	18.04	93	89.5	200	15.2	1, 68
7 1/2	3600	213T	TEFC	EM3769T-8	GE3	18.45	155	89.5	200	21	1, 68
		213T	TEFC	EM3770T-8	GE3	18.45	170	91.7	200	21.4	1, 68
	1800	213T	TEFC	EM3710T-8	GE3	19.01	127	91.7	200	21.6	1, 68
10	3600	215T	TEFC	EM3771T-8	GE3	18.45	182	90.2	200	26.8	1, 68
		215T	TEFC	EM3774T-8	GE3	18.45	189	91.7	200	28	1, 68
	1800	215T	TEFC	EM3714T-8	GE3	19.78	165	91	200	28.9	1, 68
15	3600	254T	TEFC	EM2394T-8	GE3	23.28	240	91	200	40	1, 68
	1800	254T	TEFC	EM2333T-8	GE3	23.28	255	92.4	200	42.4	1, 30, 68
20	3600	256T	TEFC	EM4106T-8	GE3	23.28	242	91	200	52	1, 24, 69
		256T	TEFC	EM2334T-8	GE3	23.28	292	93	200	55.2	1, 24, 30, 69
25	3600	284TS	TEFC	EM4107T-8	GE3	24.70	305	91.7	200	65	1, 24, 69
	1800	284T	TEFC	EM4103T-8	GE3	27.76	382	93.6	200	68.4	1, 24, 69
30	3600	286TS	TEFC	EM4108T-8	GE3	24.70	324	91.7	200	76	1, 24, 69
	1800	286T	TEFC	EM4104T-8	GE3	27.76	413	93.6	200	84	1, 24, 69
40	1800	324T	TEFC	EM4110T-8	GE3	30.28	576	94.1	200	111	1, 24, 69
50	1800	326T	TEFC	EM4115T-8	GE3	30.28	621	94.5	200	131	1, 24, 69
575 volts											
1/3	1800	56	TEFC	M3534-5	GE3	11.35	20	68	575	0.6	1, 13, 38
	3600	56	TEFC	M3537-5	GE3	11.35	19	68	575	0.8	1, 12, 38
1/2	1800	56	TEFC	M3538-5	GE3	11.35	22	74	575	0.8	1, 12, 38
	1200	56	TEFC	M3539-5	GE3	11.35	23	72	575	1	1, 12, 38
3/4	3600	56	TEFC	M3541-5	GE3	11.35	21	74	575	1	1, 12, 38
	1800	56	TEFC	M3542-5	GE3	11.35	26	75.5	575	1.2	1, 12, 38
		56H	TEFC	M3543-5	GE3	12.84	33	77	575	1.2	38
	1200	143T	TEFC	M3543T-5	GE3	13.41	34	77	575	1.2	1, 38
1	3600	56	TEFC	EM3545-5	GE3	11.97	27	77	575	1.2	12
	1800	56	TEFC	EM3546-5	GE3	12.23	38	85.5	575	1.2	1
		143T	TEFC	EM3546T-5	GE3	12.31	34	85.5	575	1.2	1
	1200	56H	TEFC	EM3556-5	GE3	12.91	41	82.5	575	1.4	
1 1/2	3600	145T	TEFC	EM3556T-5	GE3	13.31	40	82.5	575	1.4	1
		143T	TEFC	EM3550T-5	GE3	12.29	36	84	575	1.5	1
	1800	145T	TEFC	EM3554-5	GE3	13.23	41	86.5	575	1.8	1
		145T	TEFC	EM3554T-5	GE3	13.31	42	86.5	575	1.8	1
2	1200	182T	TEFC	EM3607T-5	GE3	16.55	73	87.5	575	1.9	1
		56H	TEFC	EM3555-5	GE3	12.91	41	85.5	575	2	
	3600	145T	TEFC	EM3555T-5	GE3	13.29	43	85.5	575	2	1
		56H	TEFC	EM3558-5	GE3	12.91	45	86.5	575	2.3	1
2	1800	145T	TEFC	EM3558T-5	GE3	13.31	46	86.5	575	2.3	1
		184T	TEFC	EM3614T-5	GE3	18.05	90	88.5	575	2.8	

(a) See notes on inside back flap.

Cast iron frame

*IP54 when Drain Fitting Kit #HA5027A03 is installed in the weep holes (48 thru 256T frame motors only)

Information

Single phase

General purpose

Severe duty

Large AC

Washdown duty

Explosion proof

Pump

HVAC

Farm duty

Three phase, totally enclosed, foot mounted

Hp	RPM	NEMA Frame	Enclosure	Catalog Number	Disc. Sym.	"C" Dim.	Aprx. Wt. (lb)	Full Load Efficiency	Voltage	Full Load Amps	Notes (a)
575 volts (continued)											
3	3600	56H	TEFC	EM3559-5	GE3	13.79	50	86.5	575	2.9	1
		145T	TEFC	EM3559T-5	GE3	14.17	60	86.5	575	2.9	1
		182T	TEFC	EM3610T-5	GE3	15.16	56	86.5	575	2.9	1
	1800	182T	TEFC	EM3611T-5	GE3	16.55	73	89.5	575	3.3	1
		182T	TEFC	EM3661T-5	GE3	15.24	97	89.5	575	3.3	1
		1200	213T	TEFC	EM3704T-5	GE3	19.01	129	89.5	575	3.7
5	3600	184T	TEFC	EM3613T-5	GE3	16.54	75	88.5	575	4.7	1
	1800	184T	TEFC	EM3615T-5	GE3	18.05	89	89.5	575	5.3	1
		184T	TEFC	EM3665T-5	GE3	15.24	108	89.5	575	5.3	1
	1200	215T	TEFC	EM3708T-5	GE3	19.76	154	89.5	575	5.8	1
7 1/2	3600	184T	TEFC	EM3616T-5	GE3	18.05	98	89.5	575	6.8	1
		213T	TEFC	EM3709T-5	GE3	17.89	115	89.5	575	7	1
	1800	213T	TEFC	EM3710T-5	GE3	19.02	123	91.7	575	7.6	1
		213T	TEFC	EM3770T-5	GE3	18.45	170	91.7	575	7.5	1
		3600	215T	TEFC	EM3711T-5	GE3	17.89	119	90.2	575	9.5
10	1800	215T	TEFC	EM3714T-5	GE3	20.52	165	91.7	575	9.6	1
		215T	TEFC	EM3774T-5	GE3	18.45	185	91.7	575	9.8	1
	3600	215T	TEFC	EM3713T-5	GE3	20.52	169	91	575	13.6	1
15	3600	254T	TEFC	EM2394T-5	GE3	23.28	245	91	575	14.1	1
		1800	254T	TEFC	EM2333T-5	GE3	23.28	258	92.4	575	14.6
	3600	256T	TEFC	EM4106T-5	GE3	23.28	252	91	575	18.2	1
20	1800	256T	TEFC	EM2334T-5	GE3	23.28	290	93	575	19.2	1
		3600	284TS	TEFC	EM4107T-5	GE3	24.70	335	91.7	575	22
25	1800	284T	TEFC	EM4103T-5	GE3	27.76	380	93.6	575	24	1
		3600	286TS	TEFC	EM4108T-5	GE3	24.70	331	91.7	575	26.5
30	1800	286T	TEFC	EM4104T-5	GE3	27.76	408	93.6	575	29	1
		3600	324TS	TEFC	EM4109T-5	GE3	28.78	522	92.4	575	37
40	1800	324T	TEFC	EM4110T-5	GE3	30.28	575	94.1	575	39	1
		3600	326TS	TEFC	EM4114T-5	GE3	28.78	574	93	575	45
50	1800	326T	TEFC	EM4115T-5	GE3	30.28	623	94.5	575	46	1
		1800	364T	TEFC	EM4314T-5	GE3	33.48	919	95	575	54.4
75	1800	365T	TEFC	EM4316T-5	GE3	33.48	958	95.4	575	68.7	1
100	1800	405T	TEFC	EM4400T-5	GE3	38.04	1208	95.4	575	89.6	1
125	1800	444T	TEFC	EM4410T-5	GE3	44.75	1669	95.4	575	115	1
		444T	TEFC	EM4410T-5E	GE3	44.62	1626	95.8	575	111	1, 56, 100
150	1800	445T	TEFC	EM4406T-5	GE3	44.75	2151	95.8	575	135	1
		445T	TEFC	EM4406T-5E	GE3	44.62	1770	96.2	575	132	1, 56, 100

(a) See notes on inside back flap.

Cast iron frame

Red catalog number indicates NEW product.

*IP54 when Drain Fitting Kit #HA5027A03 is installed in the weep holes (48 thru 256T frame motors only)